


SPORTDYNO V3.1
 DYNAMOMETER: SD325
 ROLLER INERTIA: 3.9

DISPLACEMENT COMPENSATION
 COMP. ISO 1585/2535 (temperature and humidity)

TEST NAME	MAX POWER.	MAX TORQUE	TEMP	Humidity %	Pressure	Date/Time
-HONDA GX 200 STD	6.5 / 4721.0	14.3 / 3045.7	32.0 °C	40 %	855.0 mbar	23/06/2005 15:46:29
-GX200 STD + EXH. EVOII + CARBU ASS.	9.8 / 4575.9	17.5 / 3103.7	32.0 °C	40 %	855.0 mbar	23/06/2005 18:45:36

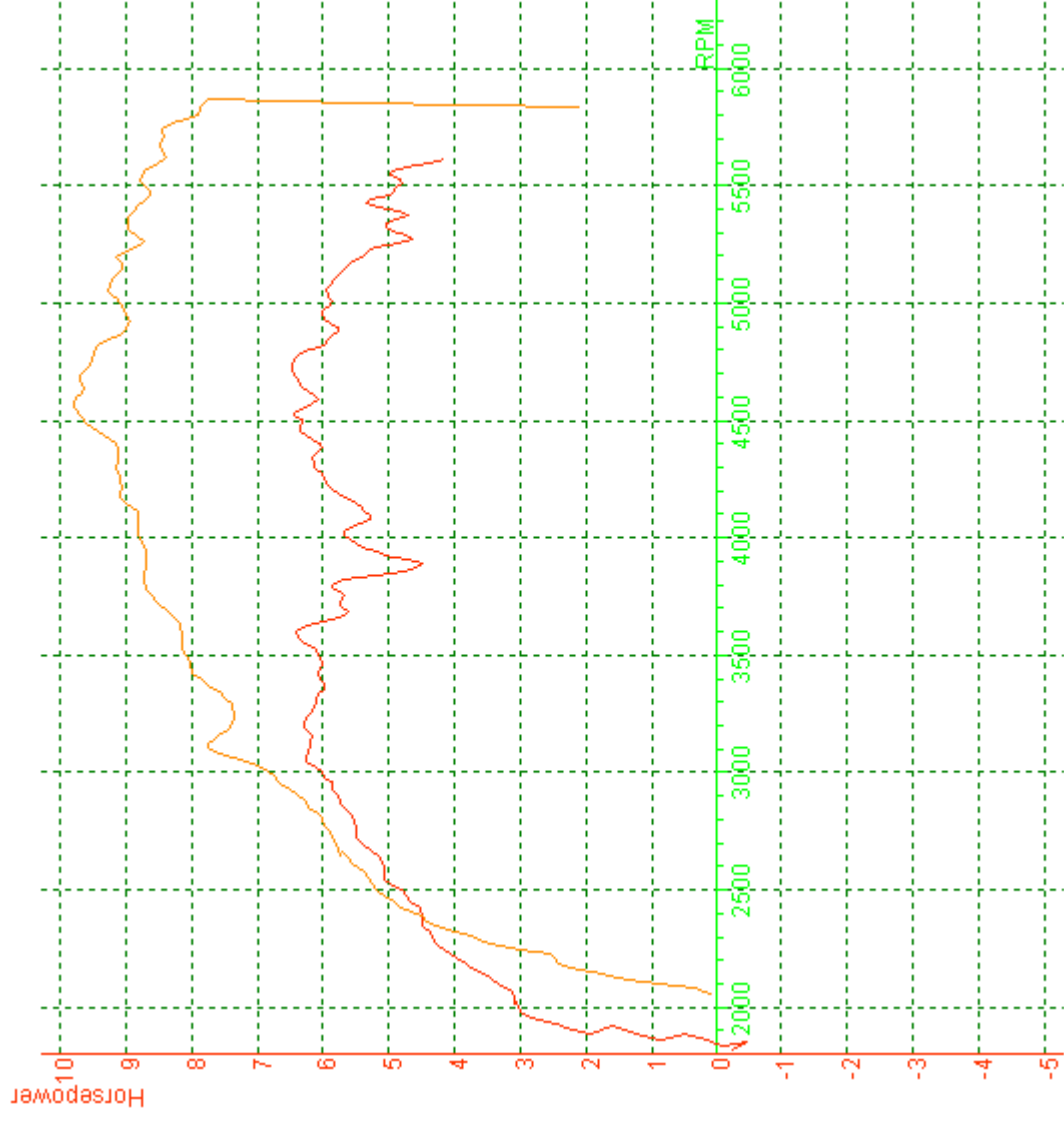

DATA FOR TEST: -GX200 STD + EXH. EVOII + CARBU ASS.

RPM	HP (HP)	TO (N*M)	EXHAUST
2250	3.2	9.8	1866.8
2500	5.2	14.6	3088.0
2750	5.9	15.1	3495.8
3000	6.9	16.0	4065.9
3104	7.7	17.5	4583.6
3250	7.3	15.8	4347.1
3500	8.1	16.2	4792.7
3750	8.6	16.1	5095.1
4000	8.8	15.3	5198.8
4250	9.1	14.9	5374.1
4500	9.6	15.0	5696.3
4576	9.8	15.0	5800.0
4750	9.5	14.0	5627.8
5000	9.1	12.7	5384.4
5250	8.7	11.6	5164.4
5500	8.8	11.1	5182.5
5750	8.4	10.2	4968.7